


## Product data sheet

### Characteristics

# EVP1HSM41

## T2S socket-outlet subassembly 1-Ph IEC - Wallbox spare part

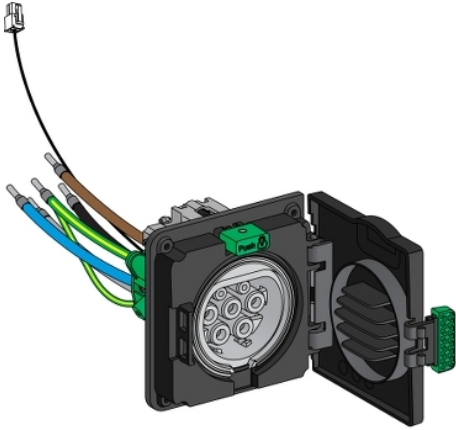

### Glavno

Skupina izdelkov	EVlink
Izdelek ali sestavni del	Vtičnica
Tip vtičnice	T2 s pokrovom/zaščito
Opis polov	1P + N
[Us] Nazivna napajalna napetost	220 do 240 V AC 50/60 Hz
Maksimalni tok napajanja	32 A
Ozemljitveni sistem	Compatible TN Compatible TT Združljiva IT z dodatnim izolacijskim transformatorjem na napajalniku
Nominalna izhodna moč	7,4 W 32 A
Združljivost serije/obsega	EVlink Wallbox EVH2 Polnilna postaja

### Komplementarno

Material	Plastika
Certifikati izdelkov	CE
Višina	110 Mm
Širina	110 Mm
Globina	90 Mm

### Okolje

IP stopnja zaščite	IP54 IEC 60529
IK stopnja zaščite	IK10v skladu zIEC 62262
Temperatura okoliškega zraka za delovanje	-30...50 °C
Temperatura okoliškega zraka za skladiščenje	-40...80 °C
Relativna vlažnost	5...95 %

### Trajnost ponudbe

Uredba REACH	<a href="#">Izjava REACH</a>
Direktiva EU ROHS	Skladnost zagotovljena <a href="#">Izjava EU RoHS</a>
Brez živega srebra	Da
Informacije o izvzetju iz RoHS	<a href="#">Da</a>
Uredba o RoHS za Kitajsko	<a href="#">Izjava O RoHS Za Kitajsko</a>

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.