


Product data sheet

Characteristics

VW3A3405

Vmesniška kartica enkoderja s potisno-izvlečnimi izhodi - 12 V DC

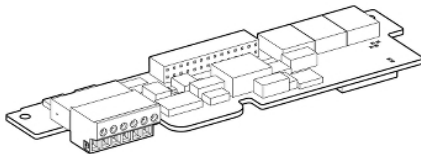

Predstavitev

Serija izdelka	Altivar
Izdelek ali sestavni del	Vmesniška kartica enkoderja
Združljivost skupine izdelkov	Altivar 61Q Altivar Lift Altivar 71 Altivar 71Q Altivar 61
Diskretni izhod tip	Potisk-poteg
[Us] Nazivna napajalna napetost	12 V DC 12...13 V)
Število impulzov na vrtenje	10000 ATV71H do do 383 5000 Vsi ATV61 pogoni 5000 ATV71H do M3 5000 ATV71H do M3X 5000 ATV71H do N4

Komplementarno

Maksimalni tok napajanja	0,175 A
Tip zaščite	Zaščita kratkega stika Zaščita pred preobremenitvijo
Maksimalna kabelna razdalja med napravami	500 M
Maksimalna delovna frekvenca	300 kHz
Vhodni signal	A B Komplement od A Komplement od B/AB/A
Vhodna impedanca	1 kOhm
Stanje napetosti 0 zagotovljeno	<= 1.5 V
Stanje napetosti 1 zagotovljeno	> 7.7...< 13 V
Električna povezava	Terminal 0,2 mm ² AWG 24) <100 m, Enkoder, 100 mA 10 V Terminal 0,5 mm ² AWG 20) <100 m, Enkoder, 175 mA 10 V Terminal 0,5 mm ² AWG 20) <200 m, Enkoder, 100 mA 10 V Terminal 0,75 mm ² AWG 18) <200 m, Enkoder, 175 mA 10 V Terminal 1 mm ² AWG 17) <500 m, Enkoder, 100 mA 10 V Terminal 1,5 mm ² AWG 15) <500 m, Enkoder, 175 mA 10 V
Teža izdelka	0,2 Kg

Embalažna enota

Teža embalaže 1	0,158 Kg
Višina embalaže 1	0,700 Dm
Širina embalaže 1	1,700 Dm
Dolžina embalaže 1	2,300 Dm

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Trajnost ponudbe

Uredba REACH	Izjava REACH
Direktiva EU ROHS	Proaktivno zagotavljanje skladnosti (izdelek je zunaj področja uporabe direktive EU RoHS) Izjava EU RoHS
Brez živega srebra	Da
Informacije o izvzetju iz RoHS	Da
Uredba o RoHS za Kitajsko	Izjava O RoHS Za Kitajsko

Pogodbena garancija

Garancija	18 months
-----------	-----------