


## Product data sheet

### Characteristics

# VW3A3408

Vmesniška kartica za enkoder razreševalnika -  
1,25 do 5,6 Vrms

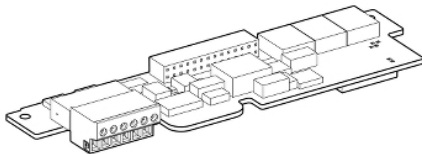

### Predstavitev

Serijska izdelka	Altivar
Izdelek ali sestavni del	Modul za enkoderski vmesnik
Združljivost skupine izdelkov	Altivar 71 Altivar 71Q Altivar Lift
Tip enkoderja	Resolver
Število impulzov na vrtenje	4096
Napetost vzburjanja	1,25 do 5,6 Vrms
Število polov enkoderja	2 2 7500 rpm 4096 2 4 3750 rpm 2048 2 6 2500 rpm 1024 2 8 1875 rpm 512 2 7500 rpm 4096 4 3750 rpm 4096 6 2500 rpm 4096 8 1875 rpm 4096

### Komplementarno

Združljivost izdelkov	ATV71H do M3383 ATV71H do M3X383 ATV71H do N4383
Maksimalna kabelna razdalja med napravami	200 M
Razmerje	Transformacija: 4: 1, 3: 1, 2: 1, 1: 1
Vzbujevalni tok	50 mA maksimum
Sekundarna napetost	1 Vrms
Pogostost vzburjanja	Prilagodljivo : 4, 8, 12 kHz
Hitrost povratne resolucije	12 +/- 1 bitov, 2exp(12) maksimum
Električna povezava	Terminal 0,2 mm <sup>2</sup> AWG 24) <25 m, Enkoder, 30 mA Terminal 0,2 mm <sup>2</sup> AWG 24) <25 m, Enkoder, 50 mA Terminal 0,2 mm <sup>2</sup> AWG 24) <50 m, Enkoder, 30 mA Terminal 0,5 mm <sup>2</sup> AWG 20) <100 m, Enkoder, 30 mA Terminal 0,5 mm <sup>2</sup> AWG 20) <100 m, Enkoder, 50 mA Terminal 0,5 mm <sup>2</sup> AWG 20) <50 m, Enkoder, 50 mA Terminal 0,75 mm <sup>2</sup> AWG 18) <200 m, Enkoder, 30 mA Terminal 1 mm <sup>2</sup> AWG 17) <200 m, Enkoder, 50 mA
Teža izdelka	0,2 Kg

### Embalažna enota

Teža embalaže 1	0,166 Kg
Višina embalaže 1	0,720 Dm
Širina embalaže 1	1,670 Dm
Dolžina embalaže 1	2,300 Dm

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Trajnost ponudbe

Uredba REACH	<a href="#">Izjava REACH</a>
Direktiva EU ROHS	Proaktivno zagotavljanje skladnosti (izdelek je zunaj področja uporabe direktive EU RoHS) <a href="#">Izjava EU RoHS</a>
Brez živega srebra	Da
Informacije o izvzetju iz RoHS	<a href="#">Da</a>
Uredba o RoHS za Kitajsko	<a href="#">Izjava O RoHS Za Kitajsko</a>

## Pogodbena garancija

Garancija	18 months
-----------	-----------